

FASTCAM MH4

HIGH-G PERFORMANCE FROM SUB-COMPACT MULTI CAMERA HEADS



On-board, Multi-head High-Speed Video System developed specifically for Automotive Safety Testing

The world's smallest camera head design providing high frame rates and excellent light sensitivity

Photron introduces the FASTCAM MH4 with four tiny cameras, each less than one and a half inches (35mm) cubed, providing incredibly light sensitive performance up to two thousand full resolution fps (frames per second). The cameras are connected to a compact processor unit; complete with battery backup for thirty minutes data retention in the event of power loss, via light-weight, flexible cables, and are available with either one or two Gigabyte onboard memory configurations dependent on your event duration.

The FASTCAM MH4 is engineered referring to SAE-J211 for operation under the most testing of environments and can operate under shock forces as massive as 100G's in any axis. The sub-compact camera heads are available with high-G lens mounts but are still lightweight enough to fit in just about any onboard location without requiring serious reinforcements. Camera heads are available in two different configurations (top cable or rear cable), and camera cable connectors are available in three different arrangements, so that cameras can be mounted in just about any configuration or orientation, ensuring you get good looking results every time.

An additional high-G battery pack is available for tests where supplying external power through costly and potentially weak umbilical cables is undesirable, or where the security of an uninterrupted power supply unit (UPS) is advantageous.

Benefits


- Small and lightweight camera head 35mm x 35mm x 34mm, weight 90g per head (excluding lens)
- Supports from one to four camera heads per processor
- High-G; 100G for 10ms in any axis
- 512 x 512 pixel resolution up to 2,000 fps
Reduced resolution up to 10,000 fps
- Gigabit Ethernet (1000BASE-T) interface
- Optional remote keypad with integrated 5" LCD video monitor for simple control of all functions and rapid switching between camera heads
- Optional Hi G battery pack for operation where external power is unavailable



Photron

www.photron.com


FASTCAM MH4



Specifications

FRAME RATE (fps)	MAX RESOLUTION (pixels)	EXPOSURE TIME	RECORD DURATION (seconds) 1GB / 2GB memory	RECORD DURATION (frames) 1GB / 2GB memory
250	512x512	1/frame rate to 6µS	16.0 / 32.0	4,092 / 8,184
500	512x512		8.0 / 16.0	4,092 / 8,184
1,000	512x512		4.0 / 8.0	4,092 / 8,184
2,000	512x512		2.0 / 4.0	4,092 / 8,184
3,000	512x352		1.9 / 3.8	5,693 / 11,386
4,000	512x256		2.0 / 4.0	8,184 / 16,368
8,000	512x128		2.0 / 4.0	16,368 / 32,736
10,000	512x96		2.2 / 4.4	21,824 / 43,648

Sensor	CMOS (Bayer system color, single sensor) with 10µm pixel, global electronic shutter and over-exposure protection	Video Output	NTSC or PAL. Live video during recording. Ability to zoom, pan and scroll within image via keypad
Shutter	Global electronic shutter from 20ms to 6µs	Recording Modes	Start, End, Center, Manual, Random
Saved Image Formats	JPEG, AVI, TIFF, BMP, RAW, RAWW, PNG, and FTIF	Camera Control	Through PFV software via Gigabit Ethernet and RS422 keypad with built in LCD monitor
Phase Lock	Enables cameras to be synchronized precisely together to a master camera or external source	Shock	100G @ 10ms 6 axis
Triggering	Selectable positive or negative TTL 5Vp-p, switch closure	Dimensions and Weight	Processor: 150mm (5.91")H x 245mm (9.65")W x 180mm (7.09")D *excluding protrusions Weight: 16.75 lbs (7.6kg) Camera Head: 35mm (1.38")H x 35mm (1.38") W x 34mm (1.34")D *excluding protrusions Weight: 0.66 lbs (0.3 kg)
Lens Mount	NF-mount, C-mount (Optional)	Power Requirements	100V - 240V AC , 65VA, 50-60Hz optional DC operation 22-32 VDC
Data Display	Frame Rate, Shutter Speed, Trigger Mode, Date or Time (can be switched), Status (Playback/Record), Real Time, Frame Count and Resolution		
Video Formats	NTSC, PAL RS170 video output		

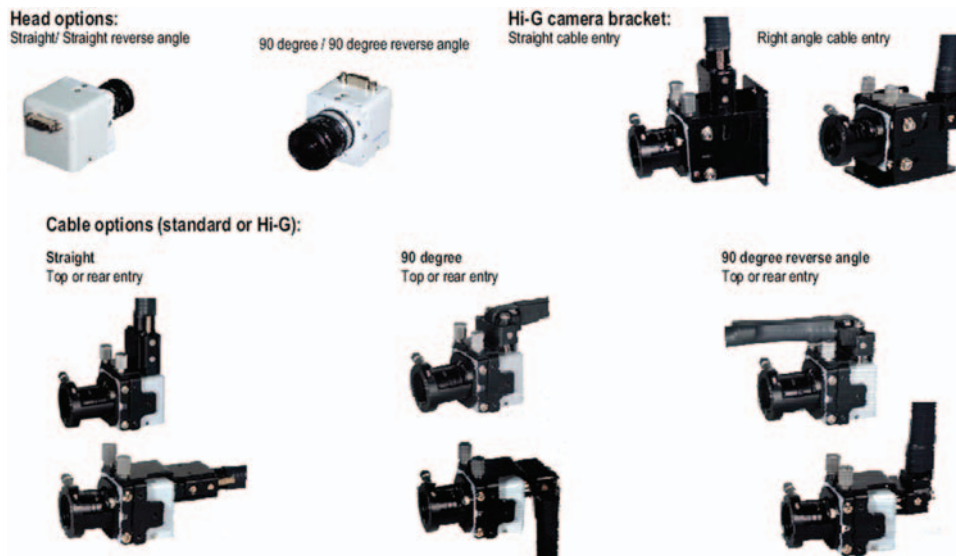

PHOTRON USA, INC.
 9520 Padgett Street, Suite 110
 San Diego, CA 92126-4446
 USA
 Tel: 858.684.3555 or 800.585.2129
 Fax: 858.684.3558
 Email: image@photron.com
www.photron.com

PHOTRON (EUROPE) LIMITED
 The Barn, Bottom Road
 West Wycombe, Bucks, HP14 4BS
 United Kingdom
 Tel: +44 (0) 1494 481011
 Fax: +44 (0) 1494 487011
 Email: image@photron.com
www.photron.com

PHOTRON LIMITED
 Fujimi 1-1-8
 Chiyoda-Ku, Tokyo 102-0071
 Japan
 Tel: +81 (0) 3 3238-2106
 Fax: +81 (0) 3 3238 2109
 Email: image@photron.co.jp
www.photron.co.jp

Photron

SLOW MOTION IMAGING SOLUTIONS